


MicroCarb - V Filters



DESIGNED BY SADETTIN YASAR



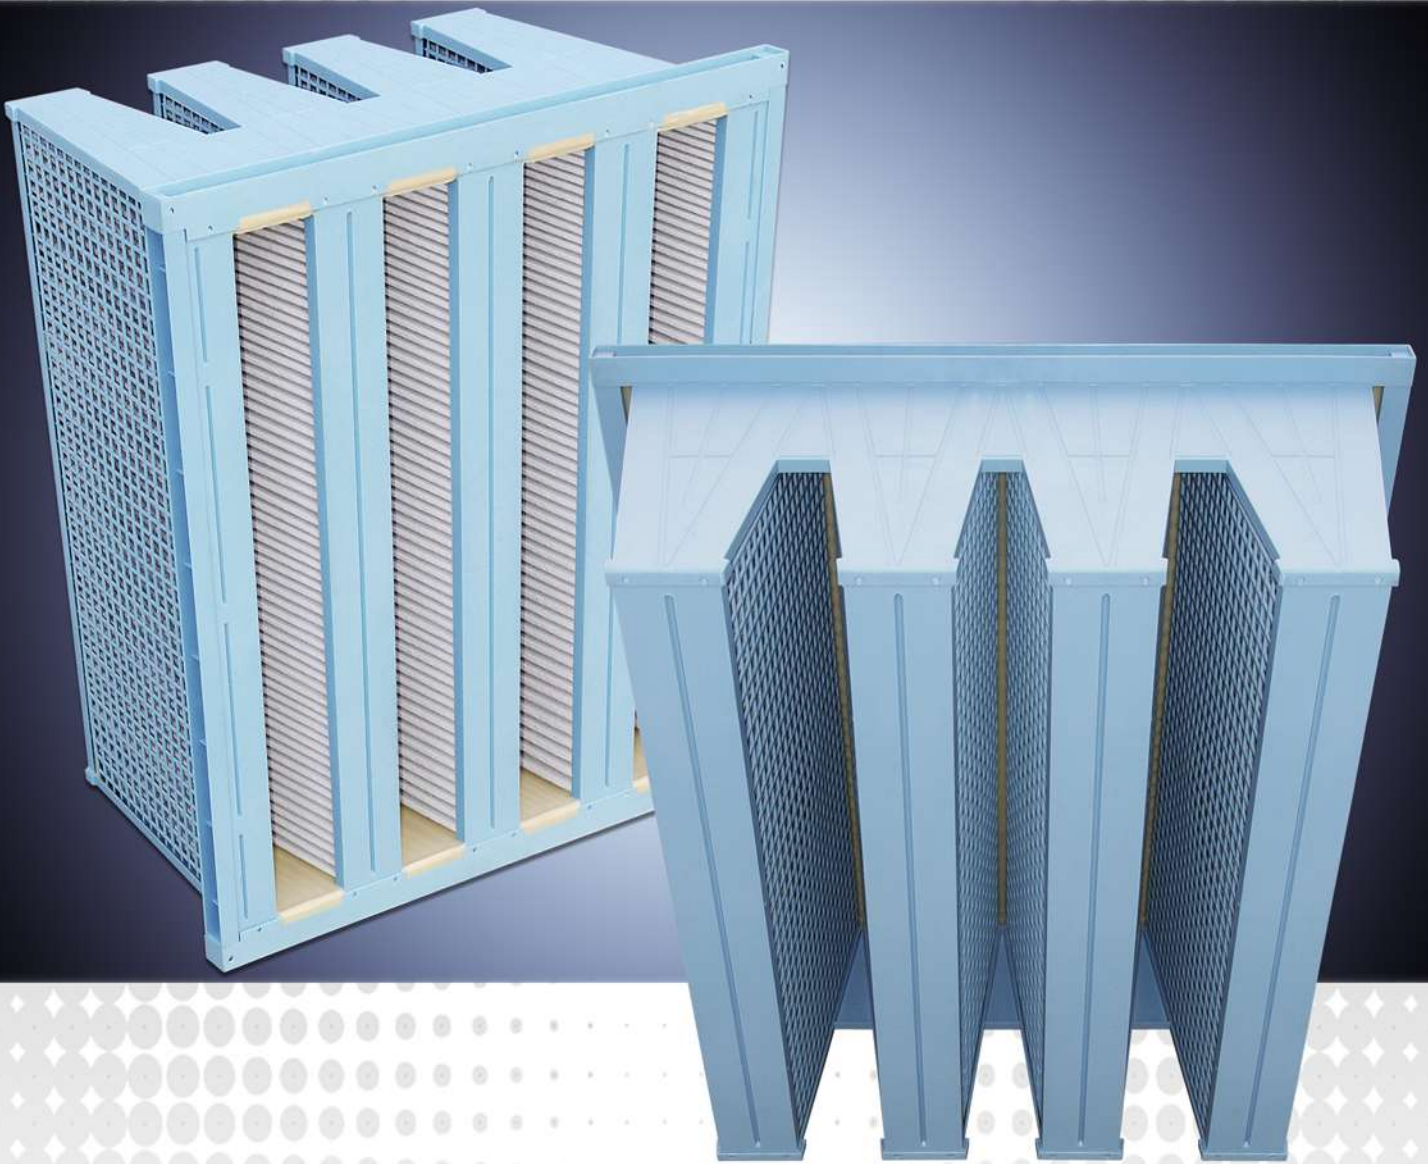

MICROCARB-V FILTER

The MICROCARB-V is capable of absorbing any of the odours. Special Activated Carbon media is used. Three sizes are available for different applications.

No maintenance is required. High filter surface area and flow rates are obtained by the equally pleated, MICROCARB-V media construction. Rigid frame construction allows easy handling and shipment.

All filters are produced in standard frame size to suit most applications with the advantage of easy installation. The permissible high final pressure drop of the MICROCARB-V gives a long service life between changes.


The MICROCARB-V is compact for limited space applications and storage. They can be intermittently exposed to water without harmful effect.

CHARACTERISTICS

Frame: Ultraviolet light and heat resistant plastic construction.

Filtering Media: MicroCarb pleatable granular activated carbon within two layers of synthetic media.

Sealant: Acid-resistant cold-foamed polyurethane.

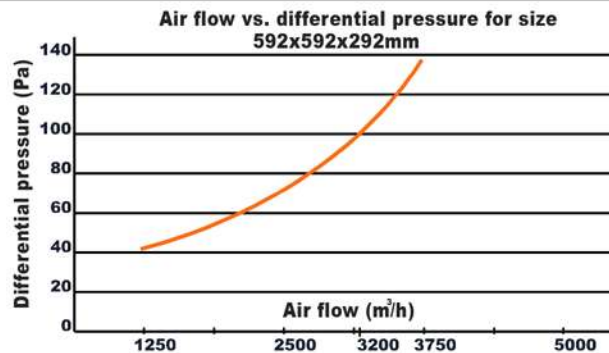

Code Designation



| Size | | 01 | 02 | 03 | |
|---|------------------|--------------------|------|------|------|
| Dimensions | Height | mm | 292 | 492 | 592 |
| | Width | mm | 592 | | |
| | Depth | mm | 292 | | |
| Flow Rate | | m ³ /hr | 1600 | 2400 | 3200 |
| Initial Pressure Drop (At nominal flow rate) | Pa | 100 | | | |
| Recommended Final Pressure Drop (At nominal flow rate) | Pa | 600 | | | |
| Filtering Surface Area | m ² | 4,3 | 7,5 | 9 | |
| Operating Temperature | °C | 70 | | | |
| Media Used | Activated Carbon | | | | |



MIKROPOR

Organize Sanayi Bolgesi Buyuk Selcuklu Bulvari No:4 06935 Ankara/TURKEY

Ph. +90 312 267 0700 Fax:+90 312 267 0552 mikropor@mikropor.com.tr www.mikropor.com.tr

